


WST-370MG FULL BLACK

The WST-370MG Full Black panel balances high performance with sleek full black finish. It fits nicely onto residential roofs of any colour without compromising the aesthetics of your home. All panels come with 1.2M Cables and EVO MC4 connectors.



WINAICO PERFORMANCE GUARANTEE

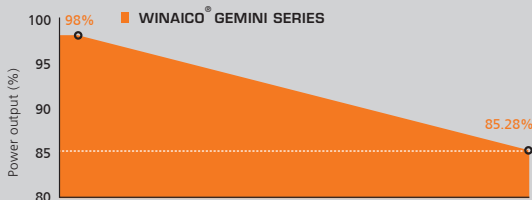

No more than 0.53% degradation per year from 2nd year to 25th year.

MECHANICAL PROPERTIES

Panel Dimensions

| | |
|-----------------|---------|
| Weight | 20.6 kg |
| Height | 1759 mm |
| Width | 1034 mm |
| Frame thickness | 35 mm |


MAXIMUM VOLTAGE AT DIFFERENT TEMPERATURES

| Temperature | Maximum Voltage |
|-------------|-----------------|
| -20 °C | 45.11 V |
| -15 °C | 44.63 V |
| -10 °C | 44.15 V |
| -5 °C | 43.68 V |
| 0 °C | 43.20 V |
| 10 °C | 42.24 V |
| 20 °C | 41.28 V |
| 25 °C | 40.80 V |
| 30 °C | 40.32 V |

ELECTRICAL PROPERTIES

| Electrical data | STC | NMOT |
|--------------------------------------|------------|---------|
| Nominal power P_{MAX} | 370 W | 269 W |
| Voltage max performance V_{MP} | 34.23 V | 31.47 V |
| Current max performance I_{MP} | 10.88 A | 8.56 A |
| Voltage open circuit V_{OC} | 40.70 V | 38.43 V |
| Current short circuit I_{SC} | 11.39 A | 9.01 A |
| Module efficiency | 20.34 % | |
| Temperature coefficient of P_{MAX} | -0.35 %/°C | |
| Temperature coefficient of V_{OC} | -0.28 %/°C | |


CLAMP ZONE

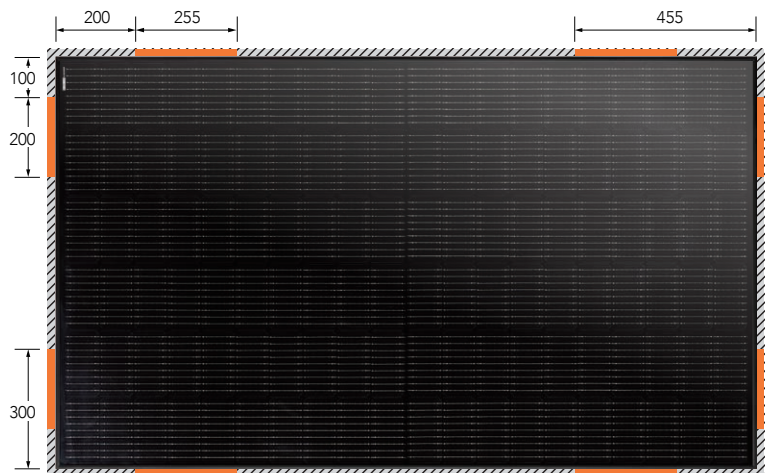

Packing Configuration

| | |
|-------------------|--------|
| Panels per pallet | 30 |
| Pallet weight | 640 kg |

CHARACTERISTIC CURVES

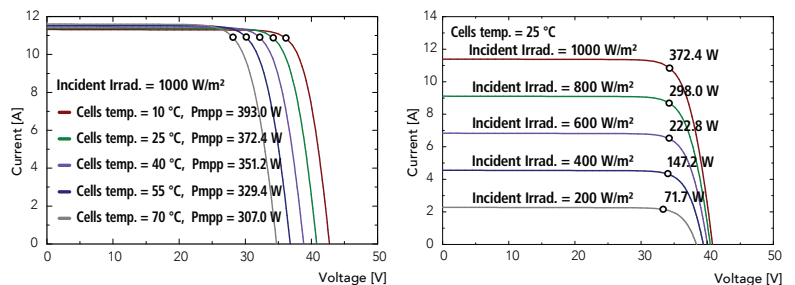

WINAICO Australia Pty Ltd

ABN: 36 156 406 067
Level 3, 393 George St
Sydney NSW 2000, Australia